




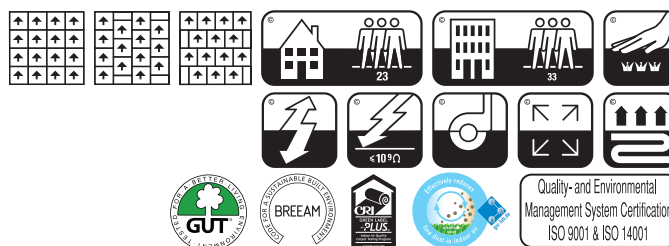
Palatino






Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10 "						
Aspect	ISO 2424	Cut pile						
Dye method	Piece dyed continuous							
Dimension	EN ISO 24342	cm x cm	50 x 50 / 19,68" x 19,68"			(20 tiles per box)		
Primary backing	ISO 2424	Polyester fleece						
Secondary backing	ISO 2424	DESSO ProBase Polyver® - Polyscan®						
Pile fibre composition	ISO 2424	BCF Polyamide 6.6						
Total thickness	ISO 1765	mm	8.0	inch	0.3			
Effective pile thickness	ISO 1766	mm	5.0	inch	0.20			
Total mass	ISO 8543	g/m ²	4450	oz/yd ²	131.3			
Total pile mass	ISO 2424	g/m ²	1100	oz/yd ²	32.5			
Effective pile mass	ISO 8543	g/m ²	845	oz/yd ²	24.9			
Pile density	ISO 8543	g/cm ³	0.169	lb/in ³	0.0061			
Number of tufts	ISO 1763	/dm ²	1500	/yd ²	125415			
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	≤ 1 x 10 ⁹					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307	33 Commercial - heavy use						
Luxury rating	EN 1307	LC 3						
Dimensional stability	EN 986	%	≤ 0,2					
Impact sound reduction ΔL _w	ISO 10140	dB	27					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	0.00	0.05	0.08	0.20	0.39	0.52
Noise reduction	ISO 354	α _w	0.15					
Thermal resistance	ISO 8302	m ² .K/W	0.089					
Flammability	EN 13501-1	Bfl - s1 (loose laid tested)						
Prodis - GUT	www.pro-dis.info	76C4034E						


 Manufactured by:
 Tarkett BV
 Taxandriaweg 15
 NL - 5142 PA Waalwijk
 EN 14041
 0493-CPR-0002





Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20200113